## OMB 3067-007 EXPIRES: JUNE 30 1990

ELEVATION CERTIFICATE
FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

This form is to be used for: 1) Post-FIRM construction only when the base flood information is available for the building site; and 2) Pre-FIRM building for completing this form can be found on the reverse side.	mas rated using Post-FIRM rules.
BUILDING OWNER'S NAME  POLICY NUM  POLICY	714558 MBER
20612 Charmy Cross (role, Estero, Fl. 3	3928
AptA/Unit-U Suite-S/BldgB  NO. ROUTE  AptA/Unit-U Suite-S/BldgB  NO. ROUTE	BOX NUMBER
OTHER DESCRIPTION (Block and lot numbers., etc.)	JU. Z
Lec County F	ATE ZIP CODE
This form is to be completed by a land surveyor, engineer, or architect who is authorized by state law to certify elevation information for zones A1-A30, AE, AH, A(with BFE), V1-V30, VE, and V(with BFE) is required. In the case of zone AO, the but owner, or the owner's representative should complete the information in Section I and may also complete the certification. Complete by local law or ordinance to provide floodplain management information may also complete this form.	ormation when the elevation
SECTION I BUILDING ELEVATION INFORMATION	
<ol> <li>Using the Flood Insurance Manual or the NFIP Flood Insurance Application—Part 2 Worksheet, indicate the present the Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the selected diagram elevation of the Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the selected diagram elevation of the Zones A1-A30, AE, AH, and A (with BFE).</li> </ol>	am is at an
3. FIRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal structural member of the re the selected diagram is at an elevation offeet NGVD (or other datum-see #5).	ference level floor from
4. FIRM Zone AO. The floor used as the reference level from the selected diagram isfeet above highest the building (also enter in line 8). This value must be equal to or greater than the AO Zone flood depth num flood depth number is available, is the building's lowest floor (or reference level) elevated in accordance with floodplain management ordinances?	ber listed below. If no
5. Indicate the elevation datum system used in determining the above reference level elevations NGVD	Other (describe on back)
6. Indicate the elevation datum system used on the FIRM for base flood elevations. NGVD Other (descri	be on back)
(ATTENTION: If the elevation datum used in measuring the elevations is different than that used on the FIRM, then th must be converted to the datum system used on the FIRM.)	e elevations provided
<ul> <li>7. Is the reference level based on actual construction? Yes \( \sum No^* \)</li> <li>* A "No" answer is only valid if the building does not have the reference level floor in place. Fill in the elevation drawings and do not complete question #8. If "No" is checked, this certification will be valid only for a construction. After construction of the reference level floor is completed, a post-construction elevation certification continued flood insurance coverage.</li> <li>8. Provide the following measurements using the natural grade next to the building (round to the nearest foot).</li> </ul>	ouildings in the course of ficate will be required for
a. The reference level is:  b. The garage floor (if applicable) is:	
	k one) the highest grade.
SECTION II FLOOD INSURANCE RATE MAP INFORMATION	
Provide the following from the proper FIRM (see Instructions on back-Date of FIRM) and accompanying insura	nce application:
(In A0 Zone, use depth) ELEVATION	Y ESTIMATED BASE FLOOD SESTABLISHED FOR ZONE A ONE V, IF AVAILABLE
Elevation reference mark used appears on FIRM Yes No (See reverse side for details)	<u>سين                                      </u>
SECTION III CERTIFICATION  This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state law to certify elevation elevation information for zones A1-A30, AE, AH, A(with BFE), V1-V30, VE, and V(with BFE) is required. In the case of zone A property owner, or the owner's representative can sign the certification. Community officials who are authorized by local law floodplain management information, may also sign the certification. I certify that the information on this certificate represents the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, See	AO, the building official, the or ordinance to provide my best efforts to interpret
SCOTT CONTROL 4324  CERTIFIER'S NAME  LICENSE NUMBER (or Affix Seal)	
Land Surveyor Bean, Whitaker, Lutz, & Barn TITLE COMPANY NAME	ses, Trc.
ADDRESS CITY STATE	33919 E ZIP
SIGNATURE DATE	(1) (18) - 133) PHONE
The insurance agent should attach the original copy of the completed form to the flood insurance policy application. The second copy	should be supplied to the
policyholder and the third copy retained by the agent. The fourth copy is for the local community permit office, if retained by the agent. The form MAY BE REPRODUCED.  FOR OPTIONAL COMMUNITY USE: Is the reference level also the lowest floor under the community's floodolain management.	equired.

YES NO If NO the elevation of the lowest floor is \_\_\_\_\_\_ feet NGVD.


## INSTRUCTIONS FOR COMPLETING THE ELEVATION CERTIFICATE

The Flood Insurance Manual and the Flood Insurance Application—Part 2 Worksheet contains a series of diagrams that are to be used to determine the reference level for the specific structure in question. The diagrams are available through local insurance agents or the National Flood Insurance Program.

"Natural grade" is defined as the "grade unaffected by construction techniques such as fill, landscaping, or berming."

A reference level is shown in each of the worksheet diagrams of the various building types. For property locations in zones A1-A30, AE, AH, and A (with BFE), Line 2 of the Elevation Certificate indicates that the elevation should be measured from the top of the reference level floor. For property locations in zones V1-V30, VE, and V (with BFE), Line 3 of the Elevation Certificate indicates that the elevation should be measured from the bottom of the lowest horizontal structural member of the reference level floor.\*

\* The insured will determine the measurements using the "top of floor" from the Flood Insurance-Part 2 Worksheet diagrams.

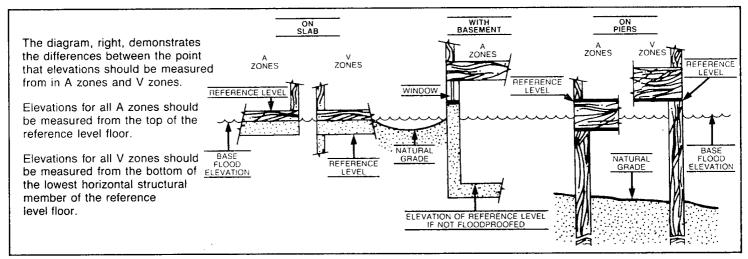

The reference level elevation may be reported to the same level of precision used to report base flood elevation on the FIRM (e.g., if the base flood elevation is shown to the nearest half foot, the reference level may be reported to the nearest half foot).

Base flood elevations are shown on the community's Flood Insurance Rate Map (FIRM) for zones A1-A30, AH, AE, V1-V30, and VE. Base flood elevations may also be on file with the community for zones A and V for all subdivisions and other new developments greater than 50 lots or 5 acres, whichever is the lesser, if the start of construction was after December 31, 1974.

Base flood depth numbers are shown on the community's Flood Insurance Rate Map (FIRM) for zone AO. These depth numbers should be used to compare with the height of the reference level floor above highest natural grade in Line 8 of the Elevation Certificate.

Elevation reference marks other than those shown on the FIRM may be used for reference level elevation determinations. In areas experiencing ground subsidence, the most recently adjusted reference mark elevations available must be used for elevation determinations. If a reference mark not shown on the FIRM is used, identify the reference mark used in the comment section.

Date of FIRM used in Section II of the Elevation Certificate can be either the date of the FIRM in effect when the certification is being provided or the date of the FIRM that was in effect at the time the building was constructed.

## **COMMENTS:**

NOTE TO INSURANCE AGENTS AND COMMUNITY OFFICIALS: In all A zones, the reference level is the top of the lowest floor and in V zones the reference level is the bottom of the slab/horizontal support. Agents should refer to the flood insurance manual for instruction on lowest floor definition.